
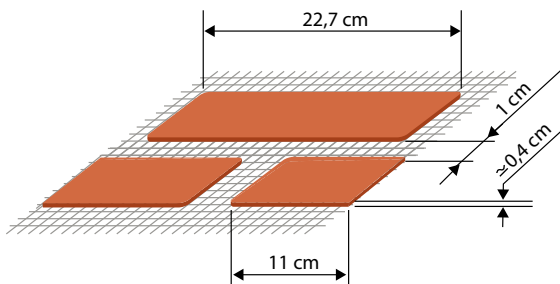
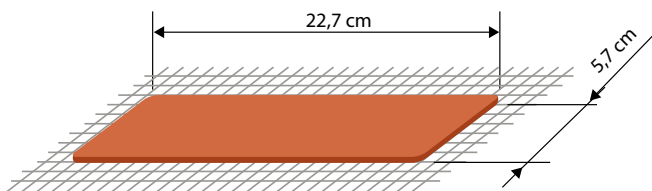


Coating for exterior and interior, brick effect, of good compactness, suitable for all those cases where it is necessary a waterproof and breathable coating as well as particularly resistant to weathering, impact and wear and which, with its thickness, hide slight imperfections of the plasters. It can be applied on civil plaster, prefabricated, cement agglomerates in general, mineral or synthetic shavings and old appropriately prepared and consolidated paints, polystyrene, wood and polystyrene with appropriate adhesives.

WEIGHT: 4,5 kg/mq

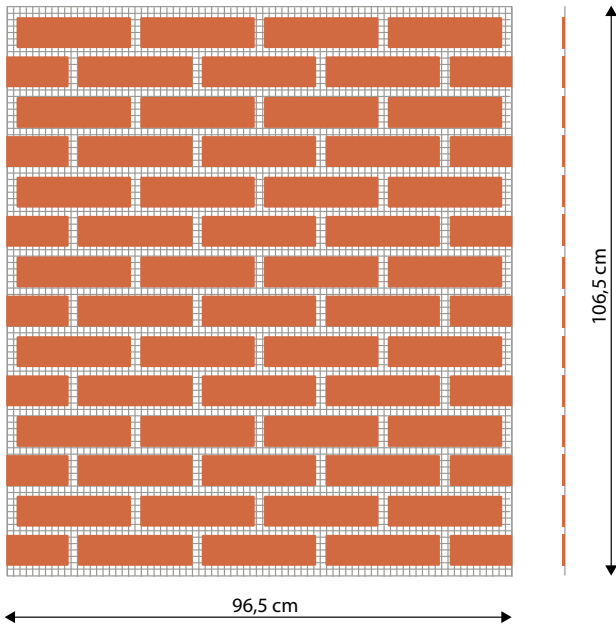

COMPOSITION

Acrylic, elastomeric copolymers in water dispersion, aggregates, minerals, water-repellent additives pigments.

STORAGE

In a room with a temperature between +5 and 35 °C.

T° APPLICATION

Not less than + 5 ° C. Relative humidity not higher than 75%.

RESISTANCE

Excellent resistance to light and strong alkali and to bad weather.

SURFACE PREPARATION

Remove moss, mold, dust and other impurities, repair any cracks and make sure that the substrate is dry and not alkaline.

APPLICATION CYCLE

With a perfectly dry surface, apply a coat of glue using a stainless steel spatula according to the substrate to be treated, proceed with the application of the product and proceed with the bonding of Mattonflex. Protect from rain for as long as necessary for drying. DO NOT apply the product at temperatures above + 35 °C or at temperatures below + 5 °C.

MATTONFLEX Srl
di CAPPELLO Francesco e Stefano & C
Sede legale e Operativa
Via Clemente Bausano 10, Rivarolo C.se (TO)

Tel. 3477161218 email: mattonflex@libero.it
Cod. Fiscale e P.IVA 11803000014

In according with UNI EN 13501-1
below the fire test report

Fire Behaviour	Smoke Production	Flaming Droplets
B	s 1	d 0

i.e. B - s1, d0

Reaction to fire classification: B - s1, d0